FEATURES

- Diaphragm cartridge maintains water temperature within ± 2°
- Safety button at 100°F prevents accidental scalding
- Temperature range is 50°F to 180°F
- Solid brass construction
- Warranty:
  - Limited lifetime warranty (residential use)
  - One year (commercial use)
- Standard finishes:
  - polished chrome
  - satin nickel
  - polished nickel
  - rustic brass
- Listed by IAPMO, CSA, NSF, & other municipalities
- Shipping weight (lbs.): 15.7
- Shipping dimensions(in.): 12 x 22.5 x13

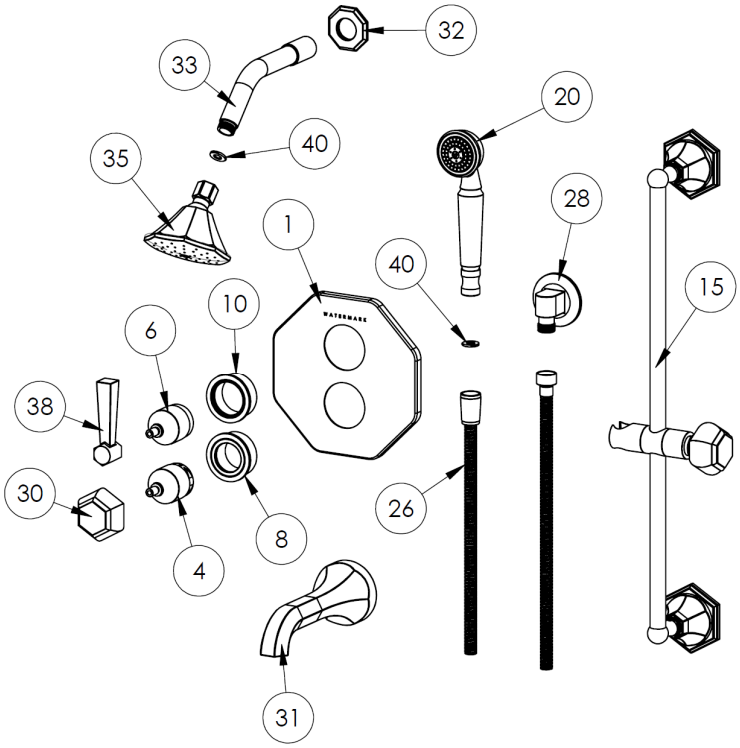

ITEM NO.	PART NUMBER	QTY.
1	SS-TFP600	1
4	TEMP-CNTRL-POST	1
6	VOL-CNTRL-POST	1
8	THRM-DOME-TEMP	1
10	THRM-DOME-VOL	1
15	POSITIONING BAR	1
20	SH-S525-A HAND SHOWER	1
26	DS-4079 HAND SHOWER HOSE	1
28	ELB-6001	1
30	TEMP-CNTRL-HNDL	1
31	TBSPT-312	1
32	SS-403OCAF-FLNG	1
33	SS-LFT70AF-ARM	1
35	SH-OCT50 SHOWER HEAD	1
38	VOL-CNTRL-HNDL	1
40	NEOPERL FLOW REGULATOR	2

NOTE: Optional components may be shown.

Trim Installation:

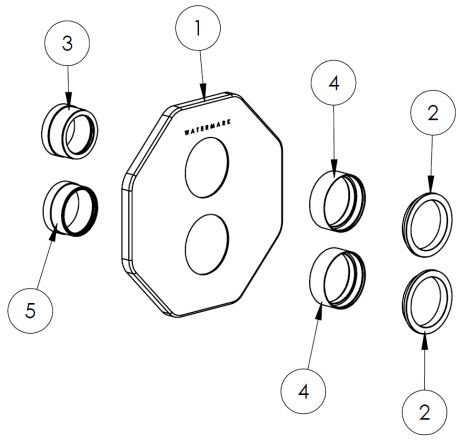

a. Screw **Temperature Control Dome (5)** and **Volume Control Dome (3)** onto valve.
   - *Please note that the **Temperature Control Dome (5)** has a larger opening than the **Volume Control Dome (3).***

b. Secure the **Thermostatic Face Plate (1)** onto the valve by sliding over the **Temperature Control Dome (5)** and **Volume Control Dome (3)**

c. Screw **Dome Sleeve (4)** onto **Temperature Control Dome (5)** and **Volume Control Dome (3).**

d. Lock the **Thermostatic Face Plate (1)** securely against the wall using the **Thermostatic Face Plate Lock Ring (2)**.

Shower & Hand Shower Dimensions:

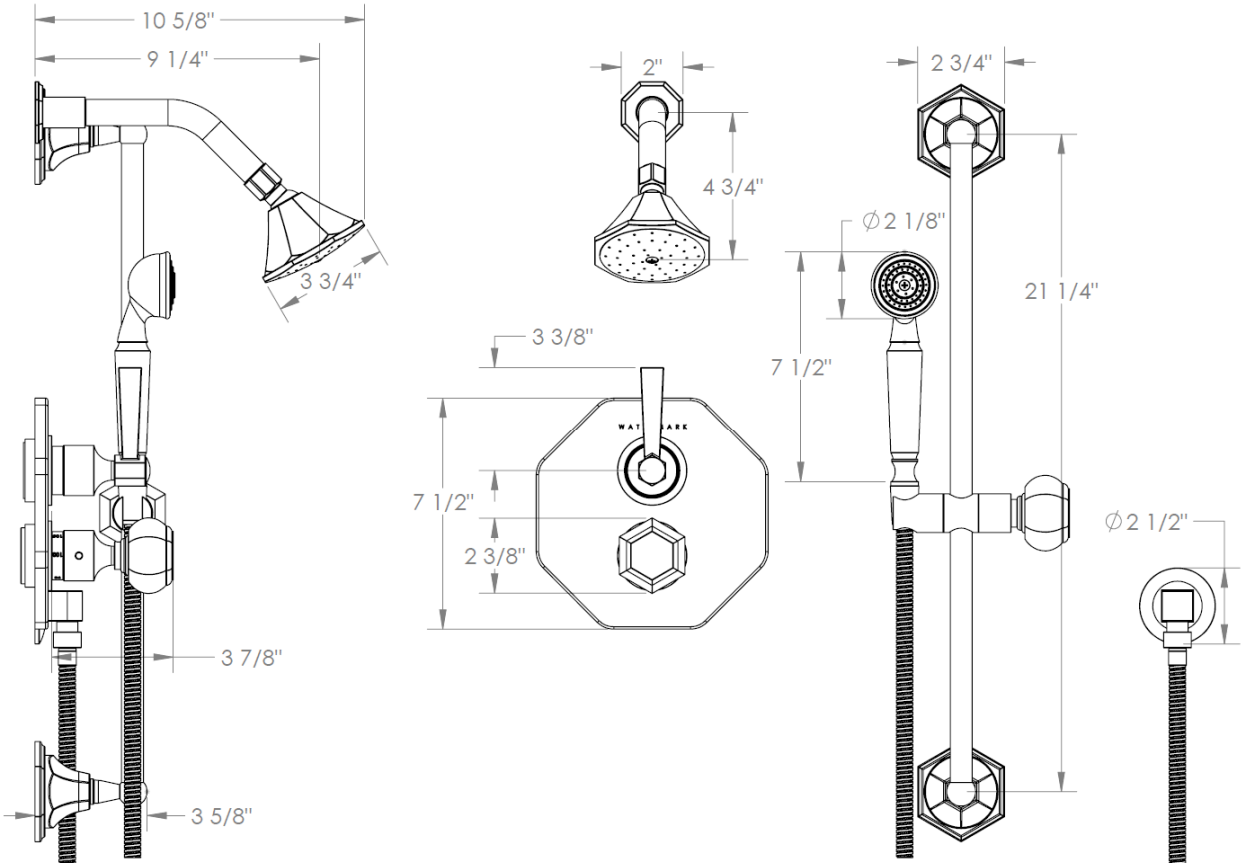

Tub Spout Dimensions:

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
  This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
  Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 888-401-1900